



DIGITAL SCREEN INTELLIGENT GEL STORAGE BATTERY - GEL SERIES


MODEL: OT65-12(GEL)/DS

NO.: 302070066-00028



Plane Chart:

Unit:(mm) Terminal type:(T3)

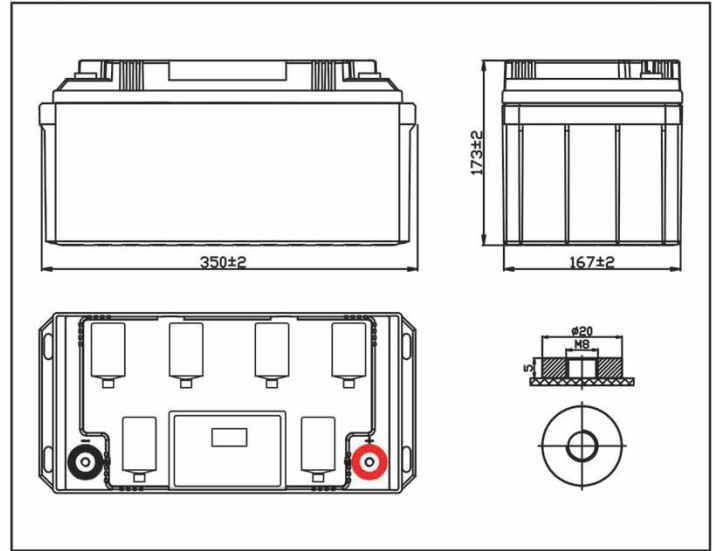


ISO 9001
 ISO 14001
 OHSAS18001




Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (6.5A)	65Ah	
Discharge Current Testing (25°C)	1 hours rate (35.7A)	36Ah	
	3 hours rate (16.2A)	49Ah	
Internal Resistance	Full Charged Battery 25°C	5.6mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 19.5A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		20.9Kg	

Residual Capacity

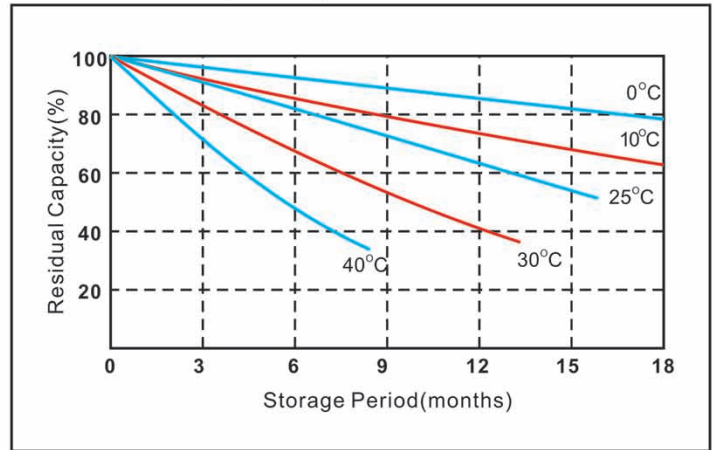



Discharge Current 25°C

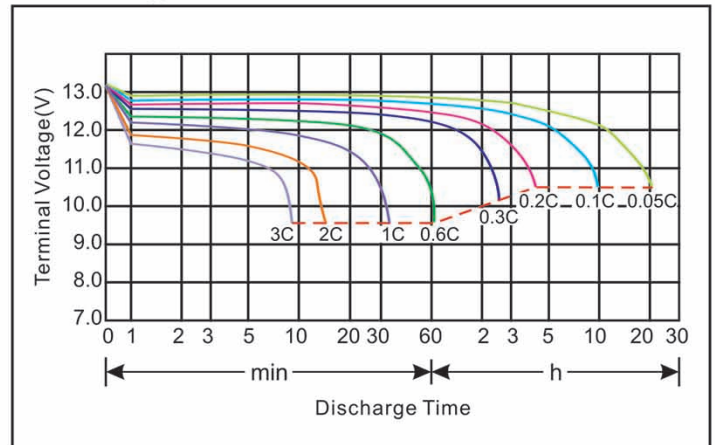

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL: OT65-12(GEL)/DS

NO.: 302070066-00028

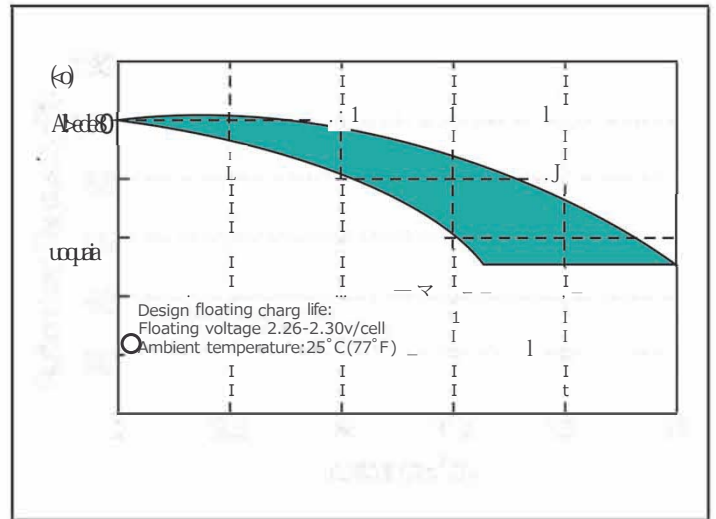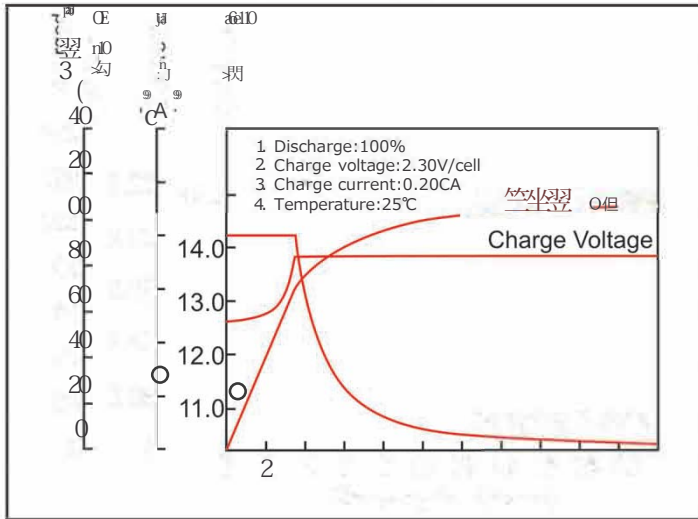

GEL											